

# Oil and Antifreeze

2008




CAT002/2008

[www.acdelco.eu.com](http://www.acdelco.eu.com)

[www.acdelco.eu.com](http://www.acdelco.eu.com)

**ACDelco**

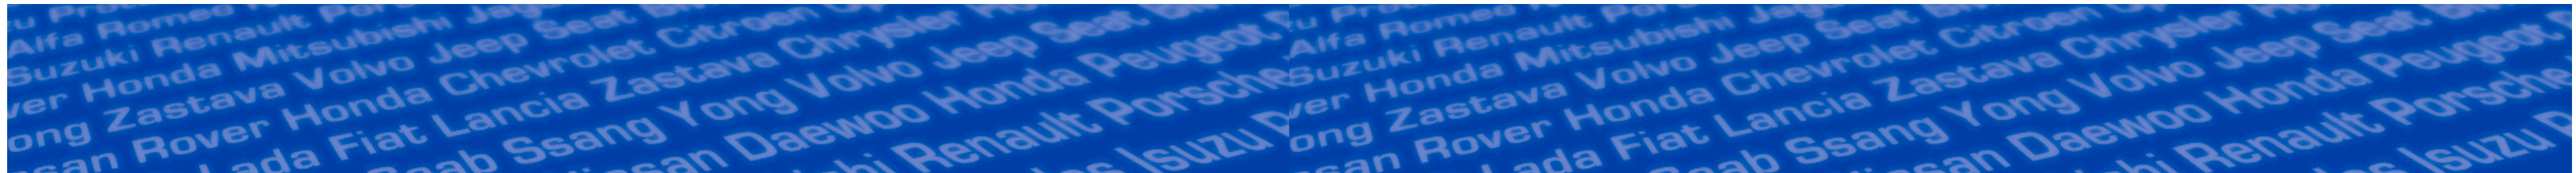

### Disclaimer

All information contained in this catalogue is based on authoritative information available at the time of publication.

However, while every precaution has been taken in the compilation of this information we cannot accept responsibility for inaccuracies in print or specification



## Supreme Plus - 5w30 LL Supreme Plus

Size	Part Number
1L	88901005
5L	88901006
20L	88901007
60L	88901008
205L	88901009

ACDelco 5w30 Supreme Plus is a multi-grade engine oil specially formulated to give long life performance. Its exceptional viscosity index makes it suitable for use in both petrol and diesel engines and allows long drain intervals.

### Specifications

API	SLCF
ACEA	A3-02/B3-98#2/B4-98
GM	LL-A-025
GM	LL-B-025



## Supreme Plus - 5w30 Supreme Plus

Size	Part Number
1L	88901000
5L	88901001
20L	88901002
60L	88901003
205L	88901004
1000L	88901068

ACDelco 5w30 Supreme Plus is a synthetic, multi-grade engine oil that is suitable for use in both petrol and diesel engines. The advanced formulation gives enhanced fuel economy benefits whilst providing optimum protection to the engine.

### Specifications

API	SL/CF
ACEA	A3-02/B3-98#2/B4-02
VW	502.00/505.00
MB	229.3
BMW	Longlife





## Supreme Plus - 0w40 Supreme Plus

Size	Part Number
1L	88900111
5L	88900112
20L	88900113
60L	88900114
205L	88900115

ACDelco 0w40 Supreme Plus is a fully synthetic engine oil of the latest generation. It is suitable for use in petrol and diesel passenger car engines and provides excellent protection and fluidity, even at low temperatures. The composition of the oil means it lubricates the engine components immediately after starting.

### Specifications

API	SLCF
ACEA	A3-98/B3-98-B4-98
BMW	Longlife
VW	502.00, 505.00, 503.01
MB	229.3
Porsche GL	



## Supreme Plus - 5w40 Supreme Plus

Size	Part Number
1L	88900106
4L	88901965
5L	88900107
20L	88900108
60L	88900109
205L	88900110
1000L	88901076

ACDelco 5w40 Supreme Plus is a modern, fully synthetic multi grade engine oil especially engineered for the latest generation of 4 stroke engines with a turbo charger. This oil offers extremely high thermal stability, an exceptional viscosity index and leading lubrication characteristics.

### Specifications

API	SL/CF, SJ CD
ACEA	A3-02/B3=98#2
MB	229.1
VW	502.00, 505.00(1/97)
Porsche	





## Supreme Plus LL III 5w30

Size	Part Number
1L	88862595
4L	88862596
5L	88862597
20L	88862598
60L	88862599
205L	88862600
1000L	88862601

ACDelco SUPREME PLUS LONGLIFE III 5W30 is a 100% synthetic, fuel economy "low SAPS" motoroil of the latest generation, which is especially developed to meet the "long life III" requirements of the cars of the constructors Volkswagen, Audi, Skoda and Seat. This oil has a longer working life for exhaust gas treatment systems and offers a very strong protection against wear, good lubrication at cold start and very good detergency and dispersion.

This oil can be used in all vehicles with extended oil drain intervals, except in V10 TDI and the 5 cylinder 2,5 TDI engines. The first generation engines with pump injector units have to use the 505.01



### Specifications

ACEA	A3/B4/C3
MB	229.51
VW	504.00/507.00



## Supreme Plus MS 5w30

Size	Part Number
1L	88862602
4L	88862603
5L	88862604
20L	88862605
60L	88862606
205L	88862607
1000L	88862608

ACDelco SUPREME PLUS 5W30 is a synthetic "mid-saps" engine oil from the latest generation, especially developed for the lubrication of Euro 4 gasoline and diesel engines, that are equipped with exhaust gas after treatment devices, like diesel particulate filters (DPF). It is fully backwards compatible for engines of previous generations (Euro 1, 2 or 3). This oil has an excellent oxidation resistance and very low resistance at start and very high thermal stability. It allows the longest oil drain intervals



### Specifications

API	SM/CF
ACEA	A3/B3/B4/C3
MB	229.511 229.31
VW	502.00/505.00
BMW	LL-04





## Supreme Plus PI 5w40

Size	Part Number
1L	88862588
4L	88862589
5L	88862590
20L	88862591
60L	88862592
205L	88862593
1000L	88862594

ACDelco SUPREME PLUS PI 5W40 is a lubricant on synthetic base, especially designed to answer the highest VW-specifications (VW 505.01) for diesel engines. By using the latest technologies, this engine oil provides an excellent performance on the latest Tdi-engines with pump injector units and a high protection of the exhaust catalyst. It was specially developed for the lubrication of Tdi-engines with pump injector units. This oil is also suitable for the most Euro 4 engines of passenger cars.



### Specifications

API	SL/CF
ACEA	A3/B4/C3
MB	229.31
VW	505.01/502.00/505.00
BMW	LL-04
FORD	WSS-M2C 917-A
PORSCHE	



## Supreme - 10w40 Supreme

Size	Part Number
1L	88900116
4L	88901966
5L	88900117
20L	88900118
60L	88900119
205L	88900120
1000L	88901069

ACDelco 10w40 Supreme is a modern, semi-synthetic multi-grade engine oil especially engineered for the latest generation of 4 stroke engines, with or without turbo charger. The component content allows stable viscosity, even at high temperature and offers a high level of resistance against ageing.



### Specifications

API	SL/CF
ACEA	A3-02/B3=98#2
MB	229.1
VW	500.00, 505.00
Porsche	
BMW	

## Supreme - 75w90 Supreme

Size	Part Number
1L	88900149
4L	88901969
5L	88900150
20L	88900151
60L	88900152
205L	88900153

ACDelco 75w90 Supreme is a premium quality semi-synthetic specially formulated for mechanical transmissions. This oil offers extreme pressure properties that are designed to prevent corrosion on copper alloys. Best applied in up to date gear boxes and some axles, especially where gear shift problems occur with thicker oils.



### Specifications

SAE	75W90
API	GL 5
MIL	MIL-L-2105 d







## Supreme FE 5W30

Size	Part Number
1L	88862652
5L	88862653
20L	88862654
205L	88862655
1000L	88862656

ACDelco SUPREME FE 5W30 is a synthetic motor oil, which corresponds to the specific requirements of the constructor Ford. The use of special selected additives provides an excellent cleanliness of the motor and protects the exhaust catalyst. Because of the high fluidity, an important fuel economy can be achieved. This oil is especially developed for the lubrication of modern gasoline and diesel engines with turbo, giving fuel economy benefits.



### Specifications

API	SJ
ACEA	A1/B1
ILSAC GF-2	
FORD WSS-M2C 913-A	
FORD WSS-M2C 913-B	
FORD WSS-M2C 912-A	



## Select - 15w40 Select

Size	Part Number
1L	88900121
5L	88900122
20L	88900123
60L	88900124
205L	88900125
1000L	88901070

ACDelco 15w40 Select is a motor oil suitable for use in petrol and diesel engines with or without turbo charger. This oil offers high detergent and dispersal properties and delivers very high resistance against oxidation. Its high lubrication power and large application make this an excellent oil for most vehicles.

### Specifications

API	SL/SJ/CF
ACEA	A2-96 Issue 2/B2-98/E2-96 Issue 2
MB	229.1
VW	500.00, 501.01



## Select - 15w40 Select Diesel

Size	Part Number
1L	88900137
4L	88901967
5L	88900138
60L	88901409
205L	88901410

ACDelco 15w40 Select Diesel is a universal motor oil that can be used in petrol engines but is especially suited to diesel engines. This oil offers extremely high resistance against oxidation and has a very low evaporation rate making it long lasting, high performing oil.

### Specifications

API	SG/CE, CF-4, CF
ACEA	A2-96 Issue 2/B2-98/E2-96 Issue 2
CCMC	G4/P4/PD2
MIL	MIL-L-2104E, MIL-L-46152D
VW	505.00
MB	227.1
MAN	271
CAT	TO2 15w\$)
VOLVO	VDS





## Select - 15w50 Select

Size	Part Number
1L	88900126
5L	88900127
20L	88900128
60L	88900129
205L	88900130
1000L	88901071

ACDelco 15w50 Select is a motor oil that can be used in a wide variety of climates and conditions and gives maximum stability of viscosity and performance. Its high lubrication power and low evaporation rate make it a long lasting, high performance oil.

### Specifications

API	CF-4/CE/SG
ACEA	A2/B3/E2
MB	229.1
VW	500.00, 501.01



## Select - 20w50 Select

Size	Part Number
1L	88900131
4L	88901968
5L	88900133
20L	88900134
60L	88900135
205L	88900136
1000L	88901072

ACDelco 20w50 Select is a universal motor oil that can be used in petrol and diesel engines. This oil is well suited to the demands of today's increased mileage and performance requirements and is increasingly used in the transport and civil engineering sectors.

### Specifications

API	SL/CF
ACEA	A3, B3
MB	229.1
VW	505.00





## Select - Classic SAE 40

Size	Part Number
4L	88901971
20L	88901973
205L	88901974

ACD SELECT SAE 40 is a monograde motor oil, primarily intended for diesel engines, with or without turbo. Very high resistance against oxidation, High detergent and dispersant properties, High neutralizing power, Strong resistance, High lubrication power, Very large application field.

### Specifications

API	SA
-----	----



## Select - SAE 40 Select

Size	Part Number
1L	88900607
5L	88900608
20L	88900609
205L	88901408

ACD SELECT SAE 40 is a monograde motor oil, primarily intended for diesel engines, with or without turbo. Very high resistance against oxidation, High detergent and dispersant properties, High neutralizing power, Strong resistance, High lubrication power, Very large application field.

### Specifications

API	SJ/CF-4, CF
ACEA	E2-96 - Issue 2
MB	228.0
MAN	270





## Select - SAE 50 Select

Size	Part Number
1L	88900610
20L	88900612

ACD SELECT SAE 50 is a monograde motor oil, primarily intended for diesel engines, with or without turbo. Very high resistance against oxidation, High detergent and dispersant properties, High neutralizing power, Strong resistance, High lubrication power, Very large application field.

### Specifications

API	SJ/CF-4, CF
ACEA	E2-96 - Issue 2
MB	228.0
MAN	270



## Select - 80w90 Select

Size	Part Number
1L	88900144
4L	88901970
5L	88900145
20L	88900146
60L	88900147
205L	88900148

ACDelco 80w90 Select is an extreme pressure lubricant for gear boxes, specially formulated to satisfy the highest service conditions: high speed, shock loads and high torque loads at low speeds. It is recommended for all hypoid transmissions, spiral gears, worm wheels and transaxles.

### Specifications

API	GL 5
MIL	MIL-L-2105 C and D





## Select 15w40 SL/CI-4

Size	Part Number
1L	89021973
4L	89021974
5L	89021975
20L	89021976
205L	89021977

ACD SELECT 15W40 SL/CI-4 is a universal engine oil, developed to satisfy the latest specifications of both European and American constructors of heavy diesel engines. It can be used for all modern diesel engines of trucks, off-road equipment and others. Moreover, it can also be used for all kinds of vehicles, including passenger cars. This oil is suitable for low-emission engines (Euro 2, Euro 3 and some Euro 4 engines) offering excellent protection against deposits in the engine and turbocharger ducts and enhancing protection against valve train wear. It also allows very long drain intervals. Not suitable for Euro 4 engines equipped with particulate filters.



### Specifications

API	SL/CI-4, CF
ACEA	A3/B3/B4/E5/E7
MB	228.3, 229.1
MAN	3275
VOLVO	VDS2, VDS3
MTU	Type 2
MACK EO-M Plus	
MACK EO-N Premium Plus	
CUMMINS CES 20076, 20077, 20078	
RENAULT RLD, RLD-2	
GLOBAL DHD-1	
CAT ECF-1	





## Select 20w50 Diesel HD

Size	Part Number
1L	88900139
5L	88900140
20L	88900141
60L	88900142
205L	88900143

ACDelco SELECT DIESEL 20W50 HD is a universal motoroil, intended for the transport sector and the civil engineering, which may be used during the whole year. It offers very high resistance against oxidation, high lubrication, high neutralising power and has a low evaporation rate making it a long lasting oil.

This oil is especially recommended for mixed fleets (passenger cars and vehicles). It can be used in all services during the whole year, in diesel engines with natural aspiration or with turbo discharge and in all gasoline engines, according to the severe prescriptions of Mercedes and VW.



### Specifications

API	SG/CF-4/CF
ACEA	A2/B2/E2
MB	227.1
VW	505.00
MAN 271	
MIL-L-2104E	
MIL-L-46152D	



## Magna - Magna Extra 20w50

Size	Part Number
20L	88901011
60L	88901012
205L	88901013

ACD MAGNA EXTRA PLUS 20W50 is a high quality, universal motor oil of the latest generation. It can be used for all vehicles, as well gasoline as diesel engines, and is particularly designated for mixed fleets. Very high resistance against oxidation, High detergent and dispersant properties, High neutralizing power, Strong oil film, High lubrication power, Very large application field.

### Specifications

API	SG/CD
MB	228.1, 229.1
CCMC	G4/D2
ACEA	A3-98/B3-98/B4-98/E2-96 Issue 2
MAN	271
MACK	EO-K/2
VOLVO	VDS



## Magna - Magna Extra Plus 20w50

Size	Part Number
20L	88901015
60L	88901016
205L	88901017

ACDelco Magna Extra Plus 20w50 is a premium motor oil suitable for all petrol engines, including multi-valve and all diesel engines, even those with extended drain intervals, including heavy trucks.

### Specifications

API	SJ/CF-4,CF
ACEA	A3-98/B3-98/B4-98/E2-96 Issue 2
MAN	271
MB	228.1, 229.1
VOLVO	VDS
MACK	EO-K/2







## Magna - Magna Long Drain 15w40

Size	Part Number
20L	88862609
60L	88901026
205L	88901027

ACD MAGNA LONG DRAIN 15W40 is a multigrade motoroil, recommended for all diesel engines in all working conditions and during the whole year. Owing to its high content of active components, this oil can be used during the whole year in the most severe conditions. Longer drain periods are possible because of its high resistance against ageing.

### Specifications

API	CG-4/CF/SJ
ACEA	A3-98/B3-98/B4-98/E2-96 Issue 2
VOLVO	VDS-2
MB	228.3, 229.1
MAN	3275
MACK	EO-L
ALLISON	C4



## Magna - Magna UHPD 10w40

Size	Part Number
20L	88862610
205L	88901023
1000L	88901073

ACDelco Magna Super Long Drain 10w40 is a semi synthetic ultra high performance diesel oil (U.H.P.D) meeting the highest performance standards for commercial vehicles. This oil provides optimum lubrication whilst meeting the increasingly stringent emissions standards for commercial vehicles.

### Specifications

API	CF
ACEA	A4-99
VW	502.00, 505.00, 503.01
MAN	M3277
CCMC	D5
VOLVO	VDS-2
MB	228.5
SCANIA	
MACK	EO-L





## Magna Multi Duty 15w40

Size	Part Number
20L	88901019
60L	88901020
205L	88901021

ACD MAGNA MULTI DUTY 15W40 is a multigrade oil, specially designed for the lubrication of diesel engines with turbo compressor or natural aspiration, even for all gasoline engines in all working conditions. Due to its low ash content, this oil is recommended for all gasoline and diesel engines of passenger cars and trucks and can be used as a multiseason oil. Long drain periods are possible because of the high resistance against ageing. This oil is specially recommended for the lubrication of diesel and gasoline engines of passenger cars, off-highway equipment, mixed fleets and transport companies.



### Specifications

API	SF/CE
ACEA	E1
MB	227.1
MAN 271	
Ford M2C-121C	
MIL-L-2104C	
MIL-L-2104D	
MIL-L-46152-B	
CCMC G2/D4/PD2	





## SPDA Hydraulic - SPDA ISO 46

Size	Part Number
1L	88901050
20L	88901051
60L	88901052
205L	88901053
1000L	88901074

ACDelco SPDA ISO 46 is a mineral based oil especially formulated for hydraulic equipment to meet the demands of pressure, temperature and speeds and is also suitable for use in workshop equipment. It is recommended for use in Vickers, Gerotor, Gresen, HPM, Denison, Cessna, Hydreco, Worthington and many more.

### Specifications

AFNOR	8600
ASLE	0-1, 70-2, 70-3
David Brown	T19, ET33
Denison	F-2
DIN	1524 part 2
VDMA	4318
US steel	26/127
Sperry Vickers	2950-SD/I-283-S3



## SPDA Hydraulic - SPDA ISO 68

Size	Part Number
1L	88901060
20L	88901061
60L	88901062
205L	88901063
1000L	88901075

ACDelco SPDA ISO 68 is a mineral based oil especially formulated for hydraulic equipment. It is distinguished by its high de-emulsifying quality, its high viscosity, low pour point and long life properties. It is recommended for use in Vickers, Gerotor, Gresen, HPM, Denison, Cessna, Hydreco, Worthington and many more.

### Specifications

AFNOR	48600
ASLE	70-1, 70-2, 70-3
David Brown	ET19, ET33
Denison	HF-2
DIN	51524 part 2
VDMA	24318
US steel	126/127
Sperry Vickers	M2950-SD/I-283-S3





## SPDA HV Hydraulic - SPDA HV ISO 46

Size	Part Number
1L	88901054
20L	88901055
60L	88901056
205L	88901057
1000L	88901058

ACDelco SPDA HV ISO 46 is a paraffinic oil with a high viscosity index for use in hydraulic circuits. This oil provides excellent anti wear properties and the highest levels of protection against corrosion. Best applied in gear boxes that require high viscosity along with mechanical and chemical stability. Also suitable for use in regulation systems and hydraulic steering.

### Specifications

AFNOR	48600
ASLE	70-1, 70-2, 70-3
David Brown	ET19, ET33
Denison	HF-2
DIN	51524 part 3
VDMA	24318
US steel	126/127
Sperry Vickers	M2950-SD/I-283-S3



## SPDA HV Hydraulic - SPDA HV ISO 68

Size	Part Number
1L	88901064
20L	88901065
60L	88901066
205L	88901067

ACDelco SPDA HV ISO 68 is a paraffinic oil with a high viscosity index for use in hydraulic circuits. This oil provides excellent anti wear properties and the highest levels of protection against corrosion. Best applied in gear boxes that require high viscosity along with mechanical and chemical stability. Also suitable for use in regulation systems and hydraulic steering.

### Specifications

AFNOR	48600
ASLE	70-1, 70-2, 70-3
David Brown	ET19, ET33
Denison	HF-2
DIN	51524 part 2
VDMA	24318
US steel	126/127
Sperry Vickers	M2950-SD/I-283-S3





## Fluids - ATF Dexron III

Size	Part Number
1L	88900154
5L	88900155
20L	88900156
60L	88900157
205L	88900158

ACDelco ATF III is a high viscosity oil for automatic transmissions. It can be used in automatic transmissions, torque converters, power steering and hydraulic circuits, for which the manufacturers prescribe a product that meets the GM ATF Dexron III or the Ford Mercon requirements.

### Specifications

GM	Dexron III
Ford	Mercon
MB	236.1, 236.5
Voith	55.6335(G607)
ZF-TE-ML	02F, 03D, 11B, 14A, 17C
CAT	TO-2
MAN	339 type F
Allison	C4
Denison	HF-0



## Fluids - 2 Stroke Smokeless

Size	Part Number
1L	88900104

ACDelco 2 Stroke Smokeless is a semi synthetic, pre-diluted oil intended for the lubrication of 2 stroke, air cooled, petrol engines. Its low smoke formulation and high thermal stability make it perfect for use in today's high powered motorcycles.

### Specifications

API	TC
JASO	FC
TISI	





## Fluids - 2 Stroke Universal

Size	Part Number
1L	88901030

ACDelco TWO STROKE UNIVERSAL is an oil for air cooled 2-stroke gasoline engines, intended for machines, of which the fuel tank is filled with a mixture of gasoline and oil, and also for machines, equipped with separate tanks. Easily miscible with gasoline this oil has a very high lubricant power and high thermal stability

This oil is applicable for all air cooled 2-stroke gasoline engines with a dilution content of 2% (1 to 50) and 4% (1 to 25). This according to the constructors' requirements.

### Specifications

API	TC
-----	----



## Brake Fluid - DOT 3

Size	Part Number
250ml	88900618
500ml	88900619

ACDelco brake fluid is specially formulated for braking systems and provides high chemical stability and excellent resistance against residue formation. DOT 3 gives a reflux boiling point of 230 degrees centigrade.

### Specifications

SAE	J1703
FMVSS (Federal Motor Standard 116)	116 DOT 3





## Brake Fluid - DOT 4

Size	Part Number
250ml	88900102
1L	88900103

ACDelco brake fluid is specially formulated for braking systems and provides high chemical stability and excellent resistance against residue formation. DOT 4 gives a reflux boiling point of 265 degrees centigrade.

### Specifications

SAE J 1703 F  
FMVSS 116 DOT 3 & 4  
ISO 4925





## Antifreeze and Coolant - Dex-Cool

Size	Part Number
1L	88901130
5L	88901131
60L	88901132
205L	88901133
1000L	88901134

ACDelco Dex-Cool Longlife Antifreeze (concentrate) is an ethylene glycol based fluid that provides maintenance free protection against freezing, boiling and corrosion. Extended coolant life, often for the life of the vehicle or engine is achieved through the use of virtually non depleting corrosion inhibitors.

### Specifications

33% concentration protects to -20C

50% concentration protects to -40C

68% concentration protects to -69C

Mixtures of more than 70% concentration are not recommended



## Antifreeze and Coolant - Premix Coolant

Size	Part Number
5L	88901122
60L	88901123

ACDelco Premix 50/50 Coolant comes ready mixed to a concentration of 50% so it can be used in a vehicle straight from the container. It provides year round frost and corrosion protection and has been developed to meet the requirements of most vehicle manufacturer

### Specifications

In its premixed form ACDelco Premix Coolant provides protection down to -37C  
Further dilution provides the following protection







## Antifreeze and Coolant - Premix 40/60

Size	Part Number
1L	88901140
5L	88901141
60L	88901142
205L	88901143
1000L	88901144

ACDelco Premix 40/60 Coolant comes ready mixed to a concentration of 40% so it can be used in a vehicle straight from the container. It provides year round frost and corrosion protection and has been developed to meet the requirements of most vehicle manufacturer

### Specifications

In its premixed form ACDelco Premix Coolant provides protection down to -27C  
Further dilution provides the following protection



